

ES Irregular Angle Clamp Set



This unique ball & socket system allows the application of direct pressure on nearly any irregular angle from 15° to 180°.

The ES Set consists of two pressure caps and two clamping blocks with anti-slip, non-marring inlaid pads to protect delicate surfaces.

Clamping block & caps are glue-resistant, reinforced fiberglass.

Set works with the Bessey TGK series.



CATALOG NUMBER	DESCRIPTION
ES SET	includes two blocks and two caps
ES24/6	includes two blocks, two caps and three Tradesmen Bar Clamps (one 24" - TGK4.524 & two 6" - TGJ2.506)
ES31/6	includes two blocks, two caps and three Tradesmen Bar Clamps (one 31" - TGK4.531 & two 6" - TGJ2.506)
ES40/6	includes two blocks, two caps and three Tradesmen Bar Clamps (one 40" - TGK4.540 & two 6" - TGJ2.506)

Flex K™ Clamps

The Flex K is a cousin of the remarkable K Body Clamp ... with this distinction: the Flex K will ensure pressure over the entire face of the clamping jaws but will also adjust automatically to clamp both parallel and non-parallel objects up to

10° off parallel. The Flex K is particularly handy in furniture making applications.

The Flex K features:
 steel reinforced jaws
 - polyamid encased to protect work surface and resist glue.



CATALOG NUMBER	NOMINAL THROAT	NOMINAL OPENING	RAIL SIZE
FK3.006	3"	6"	9/16" X 1/4"
FK4.008	4"	8"	3/4" X 3/8"
FK4.016	4"	16"	3/4" X 3/8"
FK5.524	5 1/2"	24"	15/16" X 7/16"


Timber Framing Clamp

This unique, feature-packed tool was designed for the construction trades to deliver safety and productivity to the job site ... *it's like having an extra pair of hands.*

STRIKING SURFACE ... to drive spike into framing lumber

DROP-FORGED STEEL JAWS ... hardened and tempered; galvanized surface resists rust in all work conditions

COLD-DRAWN PROFILED STEEL RAIL ... a legendary Bessey feature, for optimum strength and high static stress loadings; tempered and galvanized

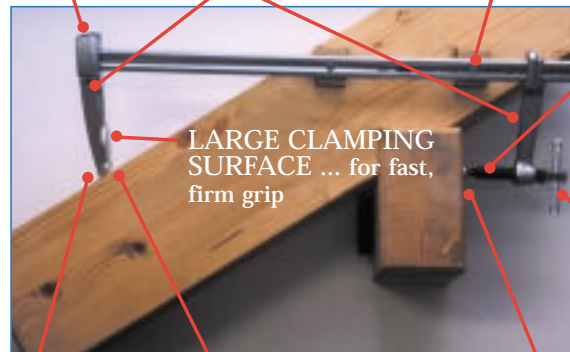

LARGE CLAMPING SURFACE ... for fast, firm grip

ROLLED, WORK-HARDENED, BROWNED SPINDLE ... for smooth action; coarse Acme thread for optimum pressure with minimum work

HIGH-STRENGTH TOMMY BAR ... for powerful hand tightening, rounded ends for comfort; electro-galvanized

PENETRATING SPIKE ... drives securely into framing timber

FLARED DEPTH STOP ... sets spike at appropriate depth; notched profile for easy removal with claw hammer

SWIVEL-MOUNTED PRESSURE PLATE ... electro-galvanized and cold extruded; large diameter for maximum grip

CATALOG NUMBER	NOMINAL THROAT	NOMINAL OPENING
TF4.7524	4 3/4"	24"